


1/25

FIG. 1

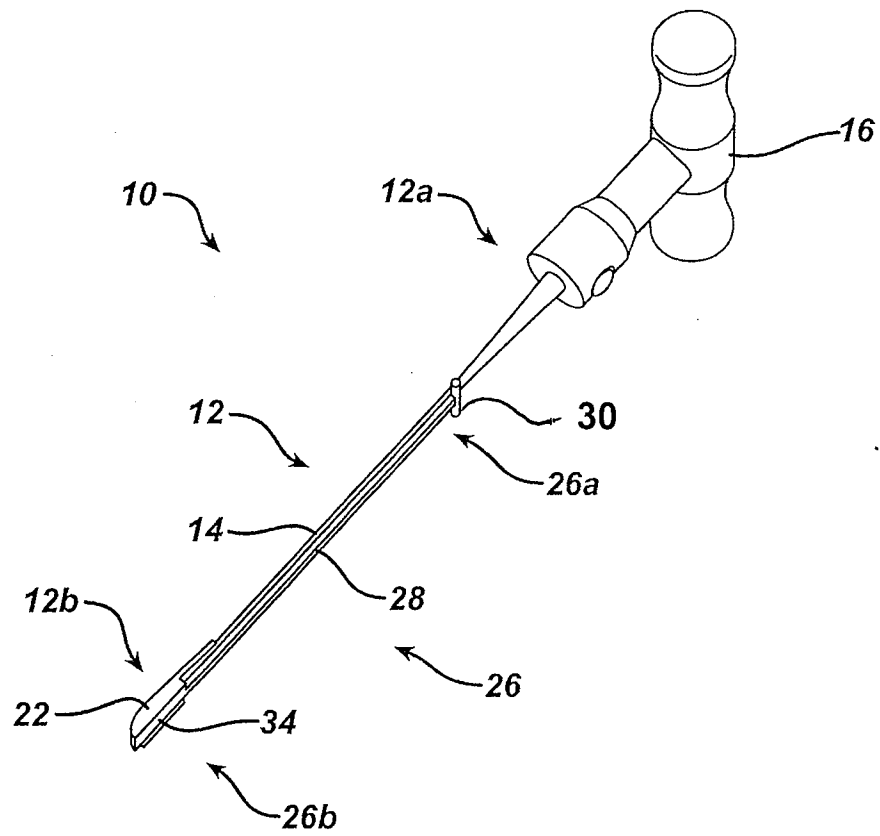

6/25

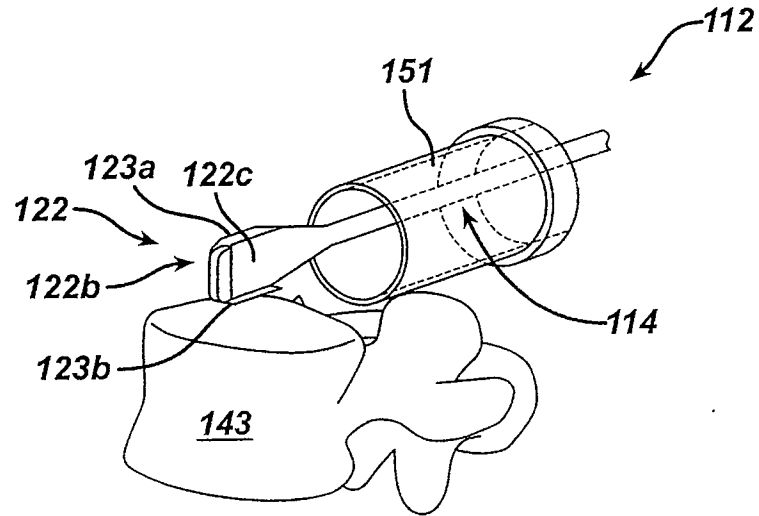


FIG. 9

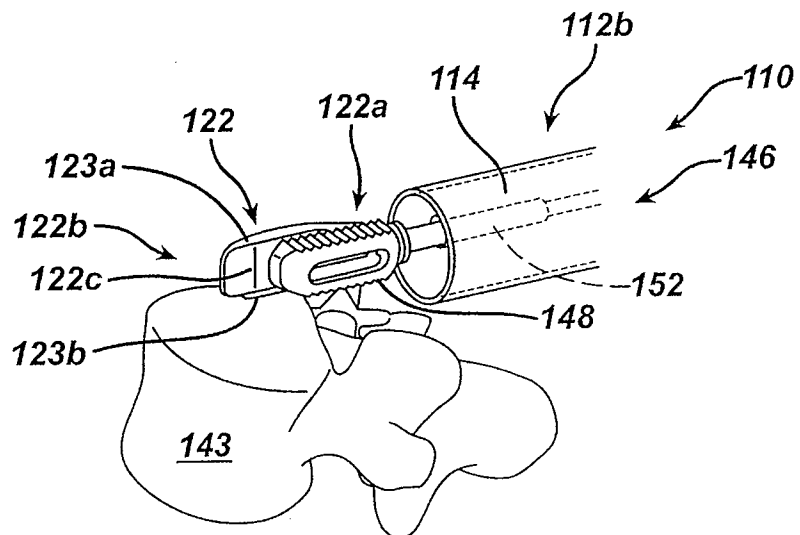


FIG. 10

FIG. 1 is a perspective view of a device 400. The device includes a base 442 with a central opening 441. A probe 407 is shown inserted into the opening, with its tip 409 positioned near the base of the opening. A label 412 points to the probe assembly.

FIG. 10 is a perspective view of a second embodiment of the tool. It features a handle 412 with a head 407 and a shaft 409. The head 407 has a central opening 422 and two side openings 433a and 433b. The shaft 409 has a longitudinal slot 414.

FIG. 19

13/25

FIG. 22


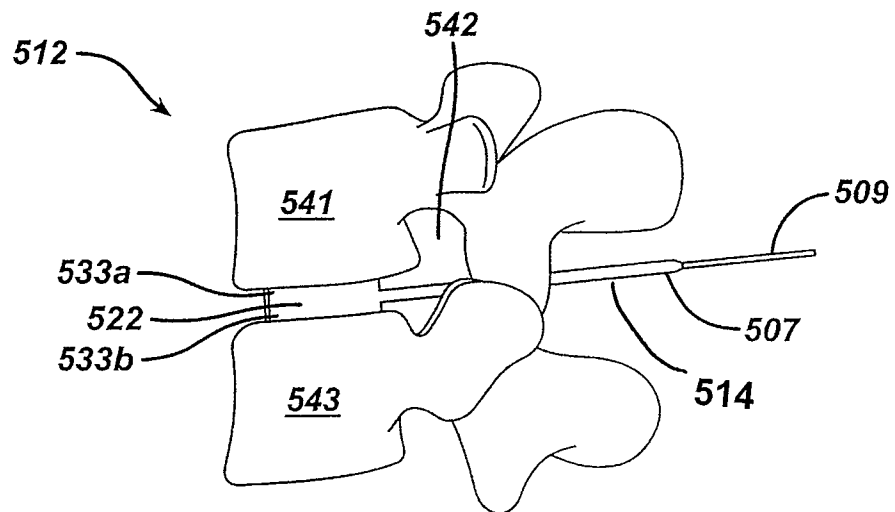


FIG. 23

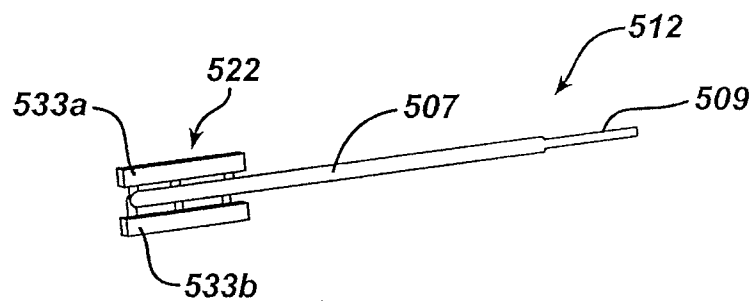

14/25

FIG. 24


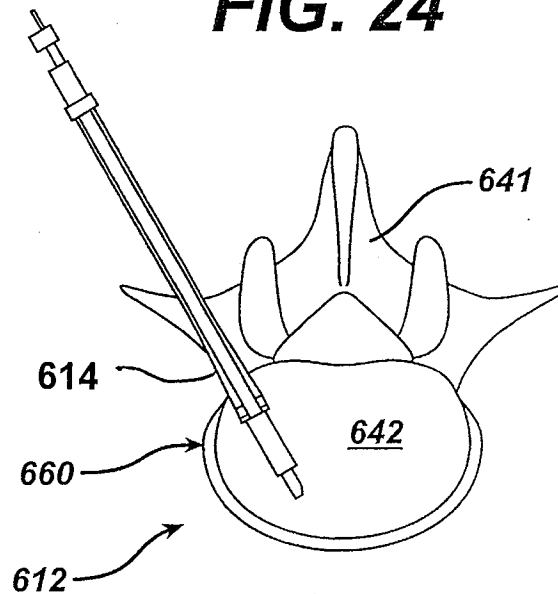


FIG. 25

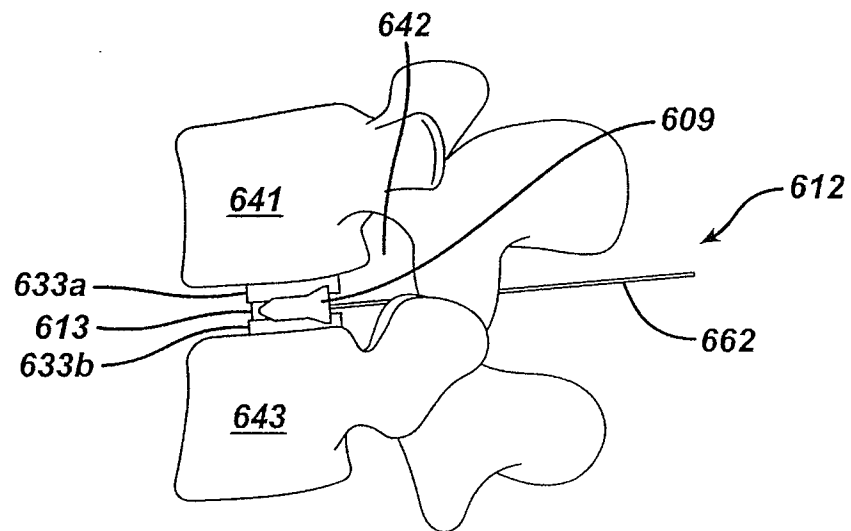

16/25

FIG. 28


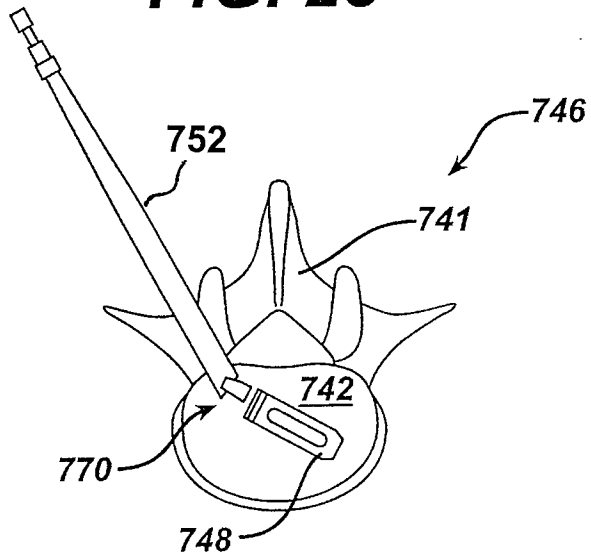


FIG. 29

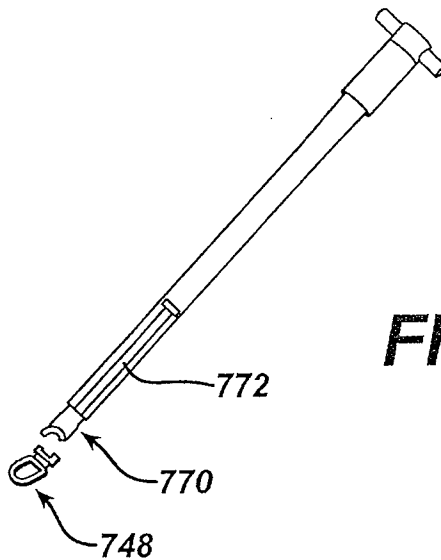

22/25

FIG. 40

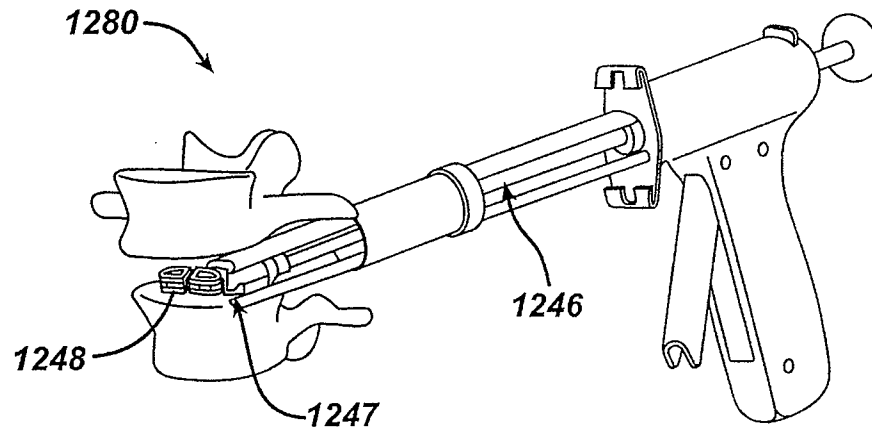


FIG. 41

